


SPRING 0627



3 - 14 years

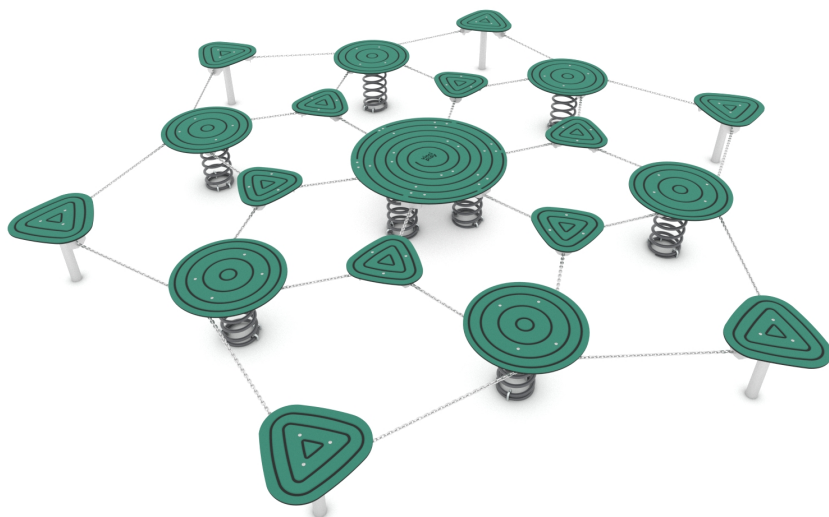

27 kids



45.4 m²

Material specification

- Powder galvanized and powder coated steel construction,
- The platform is made of recycled HDPE panel, resistant to weather conditions
- Steel springs 20 mm, iron phosphorated and powder coated,
- Calibrated stainless steel chains, preventing fingers entrapment,
- Screws covered with plastic caps and/or stainless steel screws,



Physical development



balance




passage



rocking



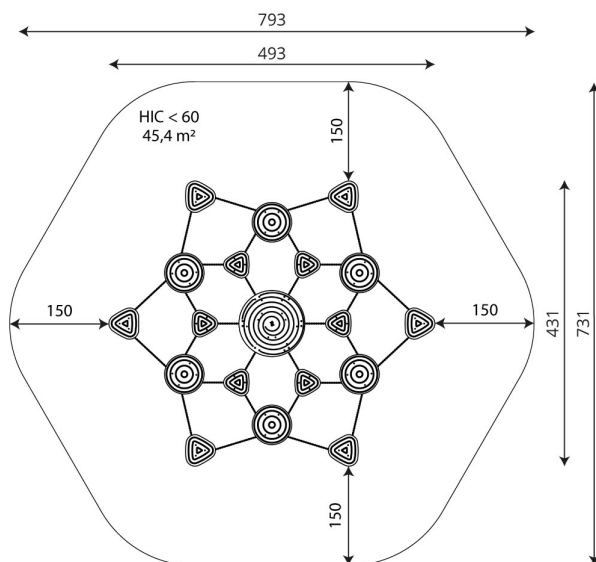

Product technical sheet

SPRING 0627

Product data

| | |
|--------------------------------|---------------------|
| Length | 493 cm |
| Width | 431 cm |
| Total height | 45 cm |
| Age group | 3 - 14 years |
| Number of users | 27 kids |
| Safety zone | 45.4 m ² |
| Free fall height | <60 cm |
| The height of the platforms | 45 cm |
| In accordance with norm EN | 1176-1:2017 |
| Weight of the heaviest part | 29 kg |
| Dimensions of the largest part | 100x100x2 cm |
| Availability of spare parts | YES |
| Installation time | 6,5 h |
| Color options | |

Data is subject to change without prior notice.

Additional information

- equipment intended for public playgrounds;
- equipment has a certificate issued by an accredited entity or a declaration of conformity;
- no sharp edges or chinks that would pose a danger of jimmieing the head, fingers or any other body parts;
- anchoring on flat surface, 80/70/60 cm deep;
- render is for reference only, the actual appearance of the equipment and its color may vary;

Guarantee

30 30 year guarantee - Structural strength of steel and stainless steel components

15 15 year guarantee - Structural failure of steel and stainless steel, for dynamic equipment

10 10 year guarantee - Structural failure of high density polyethylene and high pressure laminates components

5 5 year guarantee - Corrosion of stainless steel and hot dip galvanized and powder coated components; against bark beetles and rot in case of wooden structural elements

Detailed information in the guarantee card



SPRING 0627

Surfaces according to EN 1176-1:2017

| | Description (mm) | Layer thickness (cm) | Maximum fall heights (cm) |
|---------------------------------|------------------------------|----------------------|---------------------------|
| Turf/ top layer of soil (A,B,C) | - | - | ≤100 |
| bark (A,C) | Particle size from 20 to 80 | 30 | ≤200 |
| | | 40 | ≤300 |
| woodchips (A,C) | Particle size from 5 to 30 | 30 | ≤200 |
| | | 40 | ≤300 |
| sand or gravel (A,C) | Particle size from 0,25 to 8 | 30 | ≤200 |
| | | 40 | ≤300 |
| synthetic attested (A,B,C) | Tested according to EN 1177 | | 60 |

Amount of safe surface corresponding with free fall height:

HIC <60 45,4 m²

Data is subject to change without prior notice.

